


VT-10/13

**Pneumatic Tension-Weld® Combination Tool
for Polypropylene and Polyester Strapping**

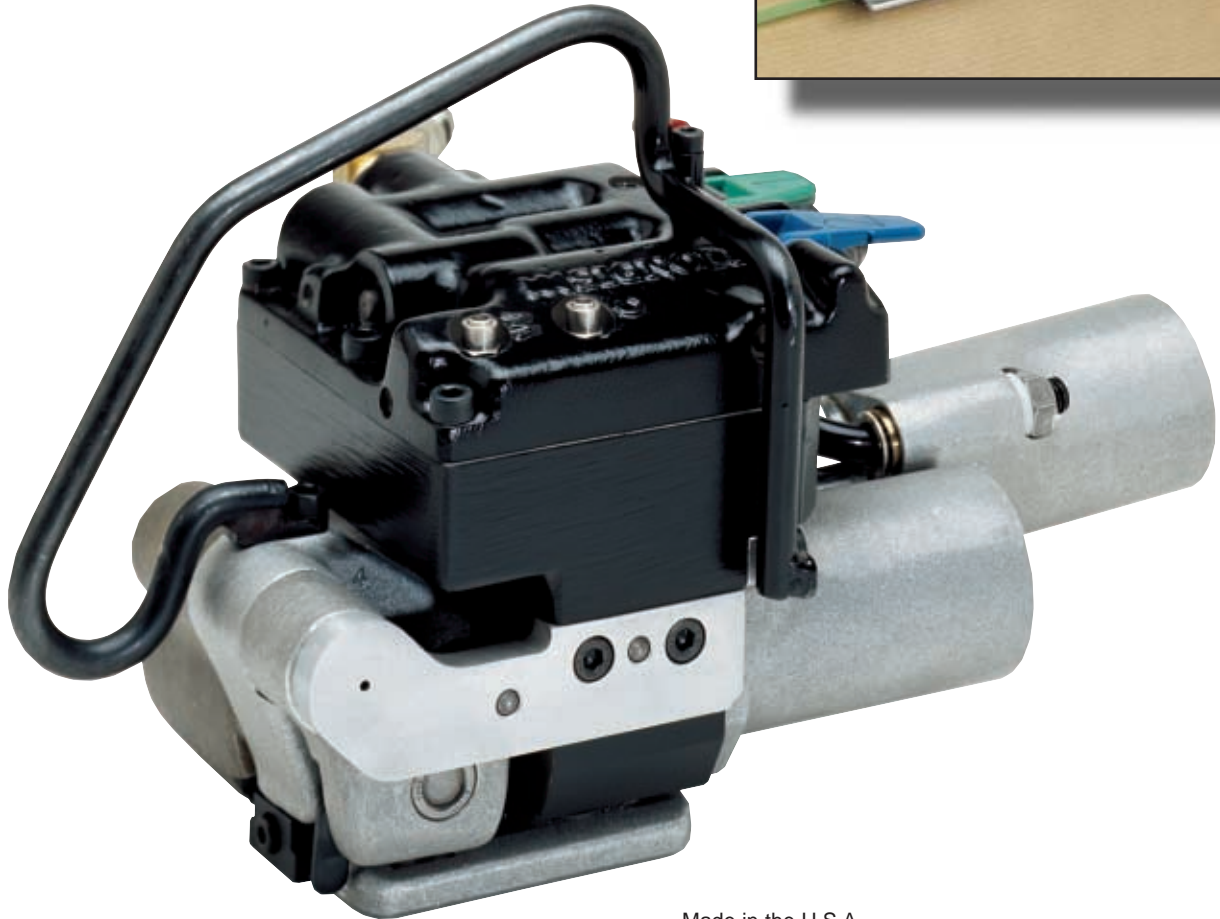

Made in the U.S.A.

Easy to operate

- Two-strap loading
- Two-button operation
- The only tool with built-in weld cool time
- Easy to remove strap after cycling
- The lightest tool in its class

Superior performance

- Fast cycle time
- Applies up to 200 lbs of tension
- High strength friction weld

Simple

- No adjustments necessary
- Fewer wear parts to replace
- Wear parts can be replaced in minutes

Durable

All metal and alloy parts provide long lasting, low-maintenance operation.

Specifications

Strapping: For use on 3/8", 7/16" and 1/2" (9mm, 10mm & 13mm) Contrax® polypropylene and Tenax® polyester strapping.

Weight: 7.0 lbs

 **SIGNODE®**

180 Hastings Drive
Buffalo Grove, Illinois 60089