

StrapPack

Automatic Strapping Machine



RQ-8S

RQ-8S

Automatic Strapping Machine for Small Packages



Ideal for strapping small bundles of Plastic Pipes, Steel Rod, Aluminum Sash and etc.

■ RQ-8S tightly straps Square timber as small as W40 × H30mm (W1-5/8 × H1-1/5 in.), Cylinders as small as 90mm (3-1/2 in.) in diameter, and Pipe or 2 Pipes of 30mm (1-1/5 in).

■ Amazing Strapping Speed

1.5 seconds per strapping cycle – That's 40 straps per minute!

■ Easy Strap Loading

Newly developed loading system free of complicated devices makes strap threading almost completely automatic – It's just a touch of lever.

■ Permanently Lubricated Mechanism

Strapack's self-lubricating design has an unsurpassed reputation for its durability and maintenance-free operation.

■ Quick Heater

Ready to operate in less than 25 seconds. Designed to insure strong seal joint.

■ Self-diagnostic

A programmable microprocessor constantly monitors critical functions. Any irregularity sensed is immediately displayed.

■ Variable Tension



A wide range of tension is available to the operator by use of a single tension dial. Tension capability up to 80kg (177 lbs.) (equivalent to 75mm (3 in.) stroke).

■ Flat Tabletop

Tabletop is only 1mm thick and has no table rollers for better tension result.

■ Dependable

Strapack's advanced bandway design assures perfect strap placement and eliminates any twisted straps.

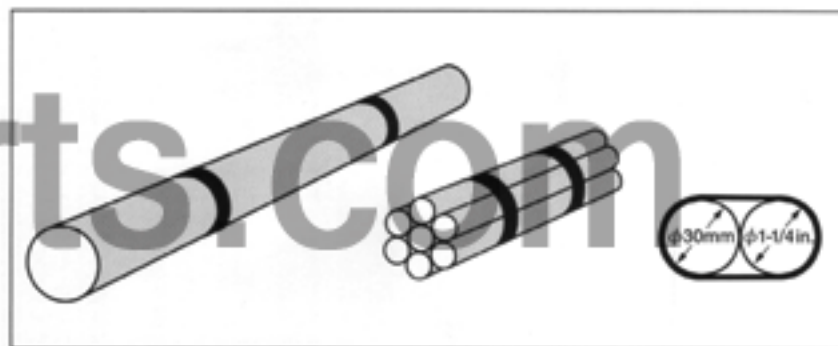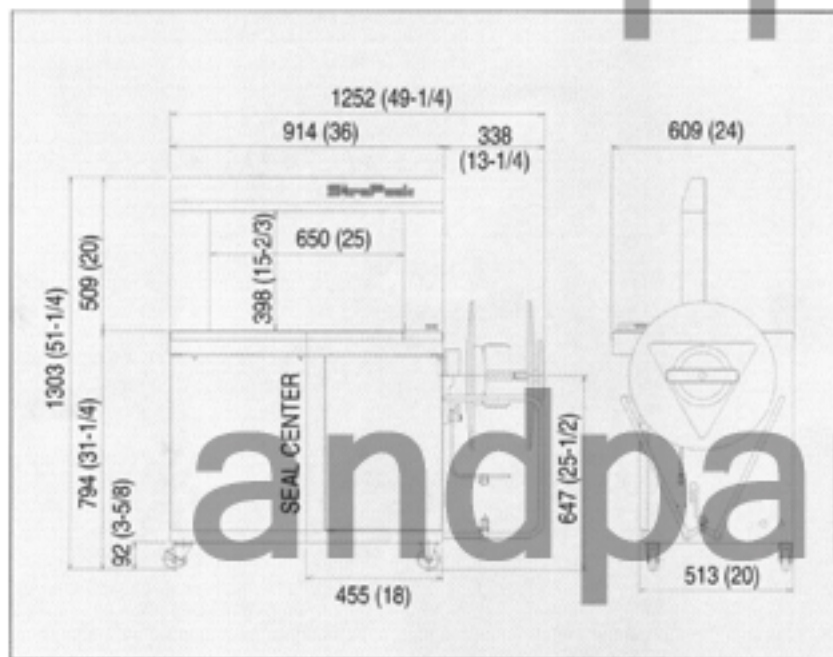

Standard Specifications

Dimensions	Width	1252mm	49-5/16 in.
	Height	1303mm	51-5/16 in.
	Depth	609mm	24 in.
	Weight	160kg	353 lbs.
Table Height		794mm	31-1/4 in.
Arch Size		W 650 × H 400mm	W 25 × H 16 in.
Package Size	Max	W 620 × H 380mm	W 24-1/2 × H 15 in.
	Min	□ Wood: W40 × H30, ○ Pipe: φ30mm × 2	□ Wood: W1-5/8 × H1-1/5, ○ Pipe: φ1-1/5 in. × 2
Joint / Strap / Coil		heat seal / polypropylene / ID 200 × OD 450 × W 200mm	heat seal / polypropylene / ID 8 × OD 18 × W 8 in.
Strap Width		5, 6, 9, 12mm	1/4, 3/8, 1/2 in.
Strap Tension		up to 80kg stroke 75mm	up to 177 lbs. stroke 3 in.
Speed		1.5 sec. / strap, 40 straps per min.	
Power Supply		100, 120, 200, 220, 230, 240V single phase 50 / 60Hz 0.65KVA	

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2000 Strapack Corporation

DISTRIBUTED BY:

WWW.STRAPPINGTOOLSANDPARTS.COM | PHONE: 1888.922.1622 | EMAIL: SALES@STRAPPINGTOOLSANDPARTS.COM