

SIGNODE[®]

Table-Tyer

▲ Smooth, Quiet Operation

▲ Economical

▲ Reliable

▲ Compact

▲ Durable


Advantages

Quiet 24V DC drive motors run only when machine is cycling

Adjustable table height
30 3/4" - 37 1/2" (780 mm - 950 mm)

All DC motors & heater are "stepped down" to 24V to increase machine safety

Signode's one year warranty on all parts, available through your local Signode Distributor

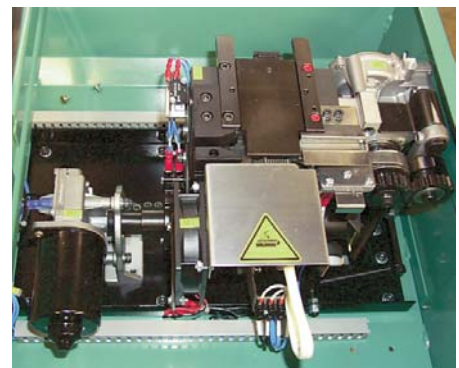

Compact mechanical control head



Low tension option for small packages



Easy to use control panel



Adjustable height

Special features of the Signode® Table-Tyer

- ▲ Unique frame design is exceptionally sturdy and durable
- ▲ Elimination of chains, belts, and pulleys
- ▲ Simplistic design substantially reduces maintenance issues
- ▲ Table height is adjustable to any height between 30 3/4" - 37 1/2" (780 mm - 950 mm)
- ▲ All DC motors and heater are "stepped down" to 24V to prolong the life of the heat knife and to increase safety
- ▲ Quiet 24V DC drive motors run only when machine is cycling
- ▲ Wide electronic control tension range from 2 - 100 lbs (3 - 45 kgs)
- ▲ Sealing head is adjustable to any strap size from 1/4" - 1/2" (6 mm - 12 mm)
- ▲ Fast heating sealing mechanism is sensor controlled, assuring you of a long life of consistent, high-efficiency seals
- ▲ Adjustable weld cool time for consistent, high-efficiency seals, even under high tension
- ▲ Signode's one year warranty on all parts through your local Signode Distributor

☞ Special small package option for sealing packages as small as 2"W x 1 1/2"H (50mmW x 30mmH)

Machine Specifications

Maximum package weight: 125 lbs (57 kgs)
Tension: 2 - 100 lbs (3 - 45 kgs)
Power Supply: 120V, 60Hz, 1Ph
Weight: 168 lbs (76kgs)
C/UL Listed

New

- ▲ Uses Signode quality polypropylene strap on a 8" or 9" core



Distributed by:

SIGNODE®

Signode Distributor Sales
180 Hastings Drive
Buffalo Grove, IL 60089
1-800-526-1948
Fax 1-847-215-9599